

## HORIZONTAL MOULDER **ARMOR ABS Standard (FHAA-S)**

### USE

- Machine to roll and shape dough balls.
- Weight from 100gr (3.5 oz) to 1200 gr (2 lb 10 oz)
- Rate of production: up to 1500 pieces/hour depending on the dough ball weight (for 350 g (12.25 oz) breads.

(\*) : Standard information that can change according to the nature of dough



### FEATURES

#### *Laminating between the roll and the belt.*



A shaping belt with removable bars that can be adapted to the type of dough

#### *Woven wool moulding belt , 5 mm thick , 750 mm (2.25 feet) wide:*

- For better shaping and better form of the shaped dough ball.
- Good support of the belts during the shaping and a higher equipment longevity.

#### *Stretching between the belt and a fixed table*



Good stretching without overheating the dough (weak, very hydrated dough, with leaven, on poolisch, ...).

#### *2 point control switches for the laminating and elongation adjustments :*

- High precision of readjustments.
- Reliability of adjustments with the time.

#### *Silent transmission line system:*

Guaranty to have of a very low sound level while the machine is running ( the sound pressure level of weighed A emission during an averaged time is below 70 Db) .

#### *Hinged safety hopper and easy removable scrapers:*

- Easy access for maintenance.
- Easy scraper dismantling for cleaning.
- Easier maintenance, higher roller longevity.

#### *Food aluminium sides of 8 mm assuring the preservation of fundamental factory adjustments such as:*


- Adaptation of the rolling mill to the moulding belt.
- The moulding belt is parallel to the fixed table.

### ACCESSORIES — OPTIONS

- **Guides** for square bread, hot dog buns, rolls.
- **Rolls-coup system**<sup>®</sup> (to cut baguettes in 2 , 3, 4 or 6 pieces).
- **Pointop**<sup>®</sup> system (shaping baguettes and short breads with sharp ends).
- Feed belt (advised for a feeding by an intermediate proofer).
- Rolling stand.
- Fitting kit on already existing discharge belt.

## PRESENTATION

**Displayed machine :** Armor ABS with feed belt (advised for a feeding by an intermediate proofer).

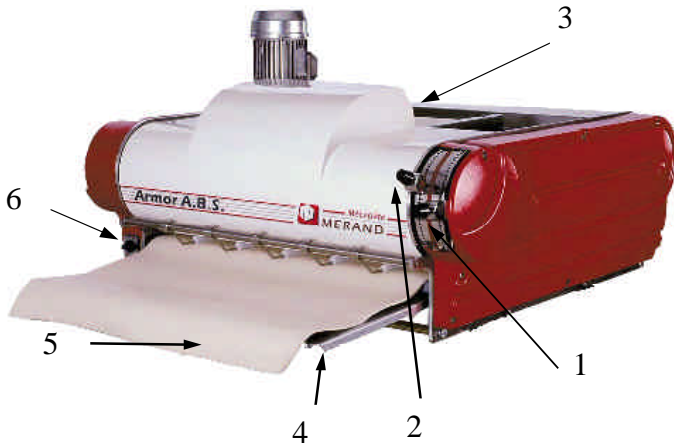

- 1—Stretching adjustment.
- 2—Laminating adjustment.
- 3—Feed belt (option).
- 4—Reception flap.
- 5—Reception flap belt.
- 6—On/off switch.

## WEIGHT AND PACKAGING DIMENSIONS

Net: 100 Kg (220 lb)

*Packaging on slatted outer carton pallet two way :*

Gross weight : 125 Kg (275 lb)  
Dimensions (Length X Width X Height) :  
1,30 m x 1,37 m x 0,80 m. (4.3 feet x 4.5 f x 2.65 f)

*Packaging on slatted wood box pallet two way (\*) :*

Gross weight: 150 Kg (330 lb)  
Dimensions (Length X Width X Height):  
1,30 m x 1,37 m x 0,80 m.


(\*) Maritime full box, non-treated wood

## HYGIENE — SECURITY

The Armor ABS moulder is in accordance:

- with 89/392 EEC, the directive on hatches.
- with the labour regulations.

## OVERALL DIMENSIONS

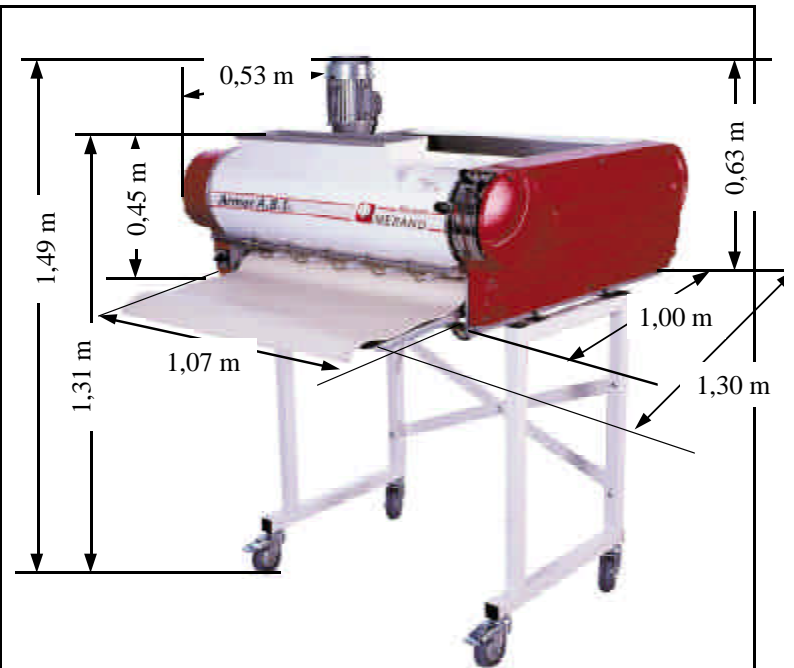

Width with sheet crankcases : 0,99 m (3.24 f.)

Moulder's support fixation footings on rolling stand or discharge belt : 0,83 m ( 2.72 feet)

## ELECTRIC SPECIFICATIONS

- 380 Volts / 50 Hz / 0,37 Kw / 1,40 A
- 380 Volts / 60 Hz / 0,37 Kw / 1,40 A
- 220 Volts / 50 Hz / 0,37 Kw / 2,17 A
- 220 Volts / 60 Hz / 0,37 Kw / 2,17 A

Power supply : 2.5 m (8.2 f) cable with plug SORTING TRI + T + N

Engine rotation speed (before the 1/10 reduction) :

- 1360 revs/min / 50 Hz



Distributed by :