



## INTERMEDIATE PROOFER *LEADER Model with Manual loading (LMB)*

### USE

- Machine to store dough balls during the resting period between dividing and shaping.
- Capacity 9 or 7 pockets per intermediate proofer for doughballs up to 600 gr\* (9 pockets) and 900 gr\* (7 pockets).
- Advance of the balance pans by pedal.
- Moulder position only outside.

(\*): Standard information that can change depending on the nature of the dough.

### CAPACITIES

Model	Total number of pockets	Number of individual proofers
LMB 51/48/7	357	51
LMB 51/489	459	51
LMB1R 66/62/7	462	66
LMB1R 66/62/9	594	66
LMB1E 72/68/7	504	72
LMB1E 72/68/9	648	72

### FEATURES

**Structure auto-portante en tube d'acier 50/50 indéformable et extensible.**

Châssis indéformable éliminant tout risque de blocage des balancelles et permet d'effectuer une extension de la

**Individual and removable pockets.**

Prevent dough balls from sticking back together and doubling up in the machine.

**Pockets in Nyltex®.**

The non sticky pockets prevent dough balls from sticking and reduce the flouring (except at the starting in order to « season » the pockets).

Machine or hand washable for the best hygiene and reduced cleaning costs.

**Pilot Balance Pan**

To find easily the first intermediate proofer loaded so as to set up in the emptying position..



**Semi-automatic group** : Divider + Intermediate Proofer + Moulder + Discharge belt.

**Machine on castors.**

Non buckling frame easy to move thanks to castors  
Area cleaning and machine movements are easier without any risk of twisting the frame or changing of adjustments.

**Advance by pedal**

Enables to run balances while getting out dough balls on foot from the divider.

**UV lamps**

To avoid the development of bacteria in pockets.

**Easy to turn into into an automatic group.**

No need to change the machine to automate. Thus, investment is guaranteed.


### OPTIONS

- Reversal way of the emptying belt for feeding a 2nd moulder on the other side (to plan an additional feedbelt).
- Folding tablet (1680 x 300 mm) covers with felt (for rounding dough balls).
- Speed variator
- Installation by a technician Merand Mécapâte with the assistance of the dealer..

## PRESENTATION



## OVERALL DIMENSIONS (in cm)

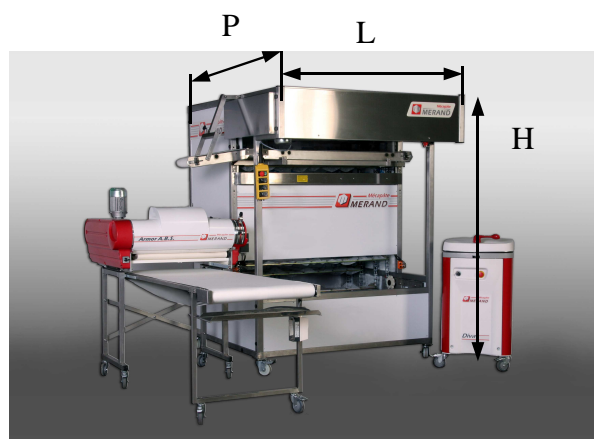

## WEIGHT — PACKING

For a delivered and assembled machine :

Model	Weight
LMB 51/487	500
LMB 51/489	500
LMB1R 66/62/7	700
LMB1R 66/62/9	700
LMB1E 72/68/7	720
LMB1E 72/68/9	720

Model	H	D	L
LMB 51/48/7	224	151	174
LMB 51/48/9	224	151	174
LMB1R 66/62/7	264	151	174
LMB1R 66/62/9	264	151	174
LMB1E 72/68/7	224	205	174
LMB1E 72/68/9	224	205	174

## HYGIENE — SECURITY

The Leader Intermediate Proofer is in accordance :

- With the directive hatches 89/392 EEC
- With the labour regulations

## ELECTRICAL FEATURES

- 380 Volts / 50 Hz / 1,50 Kw maxi
- 380 Volts / 60 Hz / 1,50 Kw maxi
- 220 Volts / 50 Hz / 1,50 Kw maxi
- 220 Volts / 60 Hz / 1,50 Kw maxi

*Power supply : cable of 4 m with plug sorting TRI + T + N*



**Mécapâte**  
**MERAND**  
La qualité sur toute la ligne

Distributed by :