

HYDRAULIC TANK LIFT WITH REAR EXIT EC-BACK

USE

Hydraulic bowl lift automatically transfers kneaded dough to the hopper of a volumetric divider or to a proofing table. Suitable for 80/120/160/200/280 trolley bowls.

FEATURES


- Rear discharge
- Sturdy painted steel construction
- Stainless steel anti-vibration feet designed for floor mounting
- Four standard discharge heights available:
 - On a table at 1100 mm
 - On a table at 1400 mm
 - In a hopper at 1900 mm
 - In a hopper at 2500 mm
- Designed for semi-industrial use: 2 shifts per day

OPTIONS

- Intermediate discharge heights available on request



DIMENSIONS

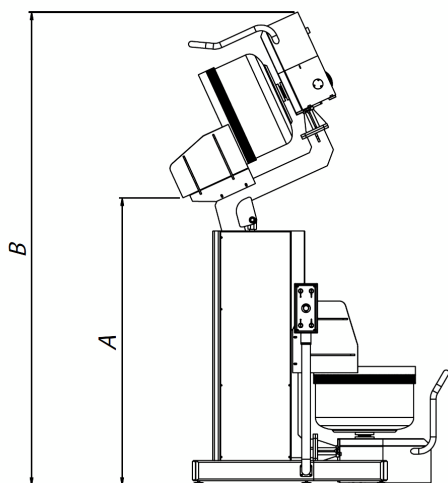

	EC-Back 1100	EC-Back 1400	EC-Back 1900	EC-Back 2500
	(mm)			
A Unloading height	1110	1540	2050	2500
B Maximum height	2620	3000	3500	4000

ELECTRICAL SPECIFICATIONS

Power: 1.5 kW
Current at 400V/50Hz: 3.53 A
Current at 220V/60Hz: 6.22 A

SECURITY

The lift complies with:

- Machinery Directive 2006/42/EC
- The Labour Code

Z.I. de la Turbanière
BRECE • 35530 • FRANCE

+33 (0)2 99 04 15 30 - salesdpt@merand.fr - www.merand.fr