

SELF-TILTING SPIRAL MIXER SPISWING

USE

Line of kneading machines specially designed for kneading all types of dough, including hydrated dough (more than 64% hydration with European flour) and hard dough (more than 45% hydration with European flour).

CAPACITIES

Model	Tank capacity (L)	Dough capacity		Flour capacity (kg)
		Min (kg)	Max (kg)	
120ST / 120DT	188	8	120	75
160ST / 160DT	266	10	160	100
200ST / 200DT	306	10	200	125
250ST / 250DT	378	12	250	150

* Information provided for guidance only.
It may vary depending on the type of dough.



FEATURES

- Consisting of a fixed bowl spiral mixer and an hydraulic elevator
- 2 motors on the spiral mixer
- 1 motor on the elevator
- Two spiral tool speeds
- Bowl reversal possible in 1st speed
- Easy dough extraction thanks to the 'pulse bowl rotation' button
- Discharge on one side only, choice between: right or left
- Transparent, shock-resistant PMMA bowl cover

- Two possible discharge heights:
 - onto a table at 1400 mm (model B)
 - onto a hopper at 1900 mm (model H)
- Dashboard can be equipped with:
 - either two electromechanical timers
 - or an electronic dashboard with bypass selector
- Craft use: 3 cycles per hour, 10-12 hours per day
- The SpiSwing DT line, equipped with double spiral transmission, straight pivot and reinforced spiral motor

OPTIONS

- Electronic control panel with bypass selector that can store up to 90 recipes


Z.I. de la Turbanière
BRECE • 35530 • FRANCE

+33 (0)2 99 04 15 30 - salesdpt@merand.fr - www.merand.fr

PRESENTATION



DIMENSIONS

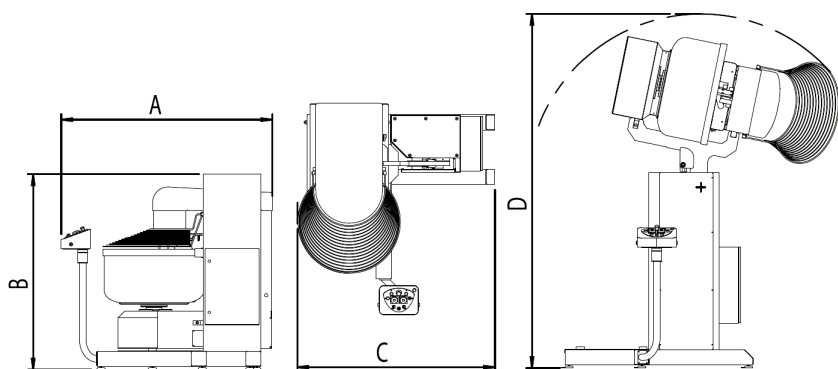

	Model	A	B	C	D
		cm			
Model B	120 ST/DT	1840	1510	1760	2500
	160 ST/DT	1950	1650	1800	2680
	200 ST/DT	1950	1650	1815	2700
	250 ST/DT	1980	1650	1865	2780
Model H	120 ST/DT	1840	1730	1760	3050
	160 ST/DT	1950	1730	1800	3200
	200 ST/DT	1950	1730	1820	3240
	250 ST/DT	1980	1730	1870	3310

WEIGHT - PACKAGING

Weight (kg)		120ST	120DT	160ST	160DT	200ST	200DT	250ST	250DT
	Model B	1045	1085	1235	1285	1245	1295	1300	1350
	Model H	1175	1215	1365	1415	1375	1425	1425	1475

ELECTRICAL FEATURES

	120ST	120DT	160ST	160DT	200ST	200DT	250ST	250DT
Spiral motor power kW	5.2	6.2	10.3	12	10.3	12	12	12
Tank power kW	0.55		0.75		0.75		1.1	
Hydraulic unit motor power kW	1.5		1.5		1.5		1.5	
Current at 400V/50Hz, A	15,26		24,13	28,1	24,13	28,1	28,1	
Current at 220V/60Hz, A	25,85		45,6	53,6	45,6	53,6	53,6	

SECURITY

- The kneading machine complies with:
- Machinery Directive 2006/42/EC
- Labour Code

Z.I. de la Turbanière
BRECE • 35530 • FRANCE

+33 (0)2 99 04 15 30 - salesdpt@merand.fr - www.merand.fr